




## 1. Descriptions of Motor Buttons and Interface Positions

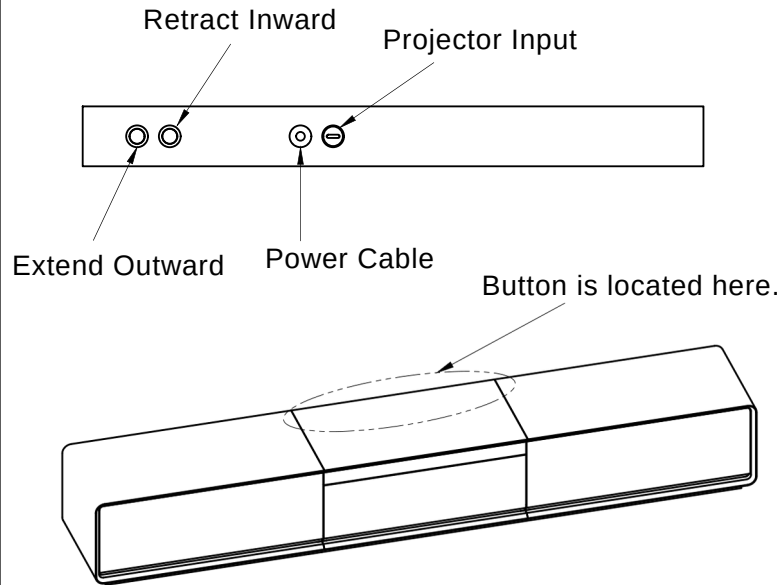


2. Power on the cabinet and wait 3-5 seconds for the system to initialize. Press and hold the "Extend" or "Retract" button until the projector platform reaches your desired position.

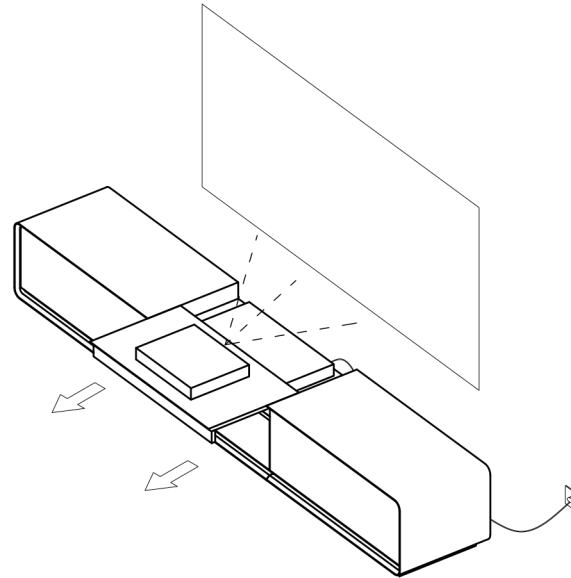


## User guide

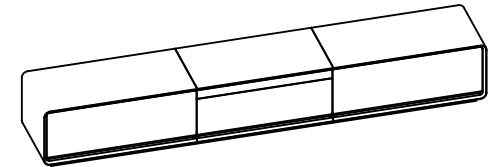


## The detailed specifications of buttons and interfaces

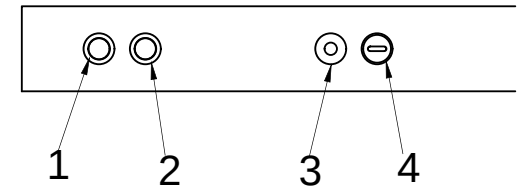

3. After completing Step 2, wait for 30 seconds. Turn off the power and wait 10 seconds to allow the system to discharge. Power the cabinet back on – the platform will automatically retract into the cabinet.

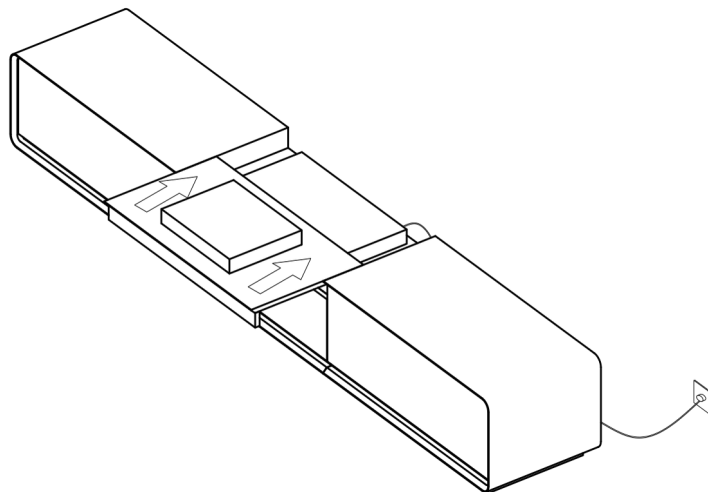

4. Once the setup is complete, the platform will automatically extend outward when you turn on your projector.

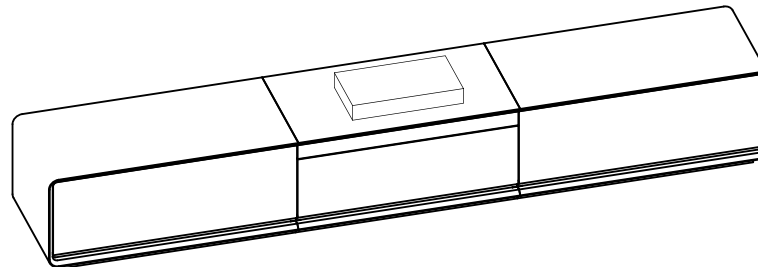

Note: Ensure all cables are securely connected before operation. For safety, avoid interrupting the power during movement.

1. Extend Outward – Press to extend the projector platform forward.

2. Retract Inward – Press to retract the projector platform back into the cabinet.

3. Power Cable – Connect the stand's power cord here.

4. Projector Input – Plug in your ultra-short throw projector to this port.