



1. Installation of cabinet feet1. Installation of cabinet feet

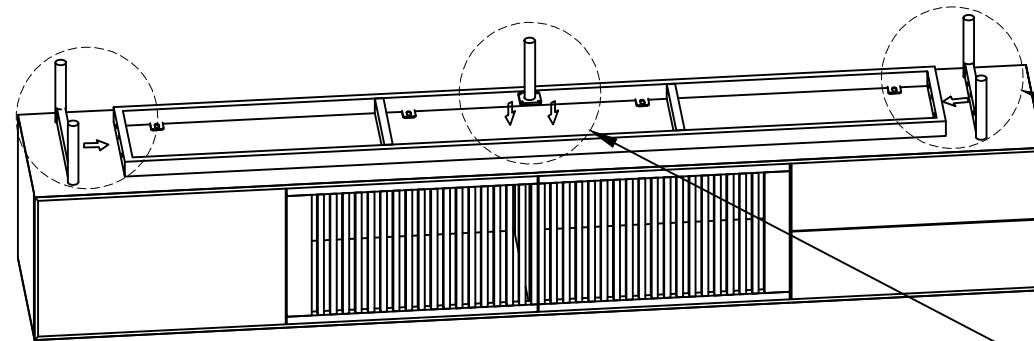


(1.1) Place the side feet on both sides of the foot stand to align the holes, and then insert the hexagonal socket thread and gasket into the foot stand and tighten them with a wrench


Hexagon socket thread +Gasket
(M8*30mm)




(1.2) Place the middle foot in the center of the cabinet bottom plate, and use a screwdriver or electric drill to drive in the tapping screw

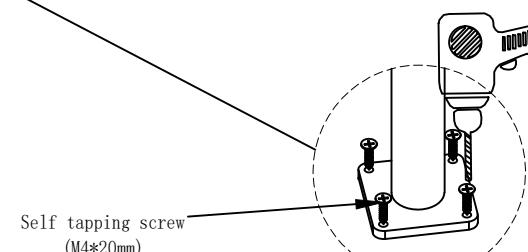

2. Installation completed

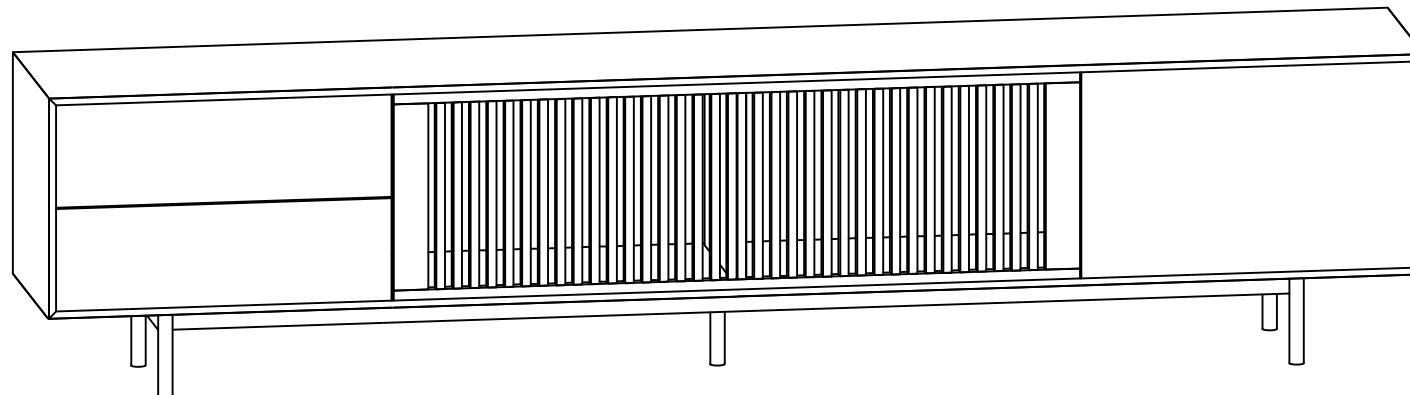

Installation instruction

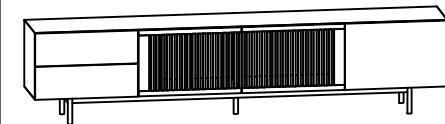

TS3042BB24 Installation

The number of people needed for installation: 2

- ① Please read the manual carefully before installing this product. And strictly follow the installation process
- ② Please take good care of this manual for your next installation

Parts list

Serial number	Shape	Name	Quantity
A		Hexagonal socket thread (M8*30mm)	6
B		Gasket	6
C		Self tapping screw (M4*20mm)	4
D		Lateral crura	2
E		Midfoot	1