



1. Place the wall-mounted back panel in the appropriate position on the wall, use a marker pen to mark the holes to be installed on the wall and the back panel, and then use an electric drill to drill holes in the wall (installation requires load-bearing solid walls). Then, insert the expansion screw expansion tube and screw kit into the drilled holes.

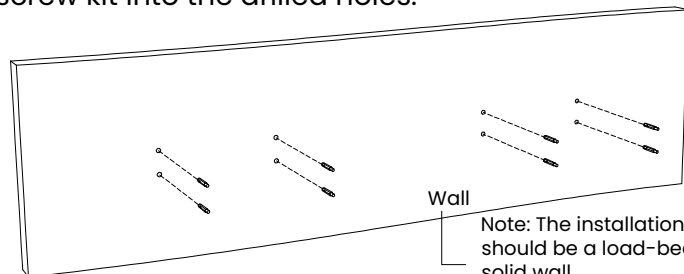


Wall

Note: The installation wall should be a load-bearing solid wall.

1. For example, ordinary tiles, wallpaper walls, ordinary latex walls can be installed
2. Can not be installed: the whole marble wall, hollow wall, large rock plate background wall, etc.





Screw+Expansion tube

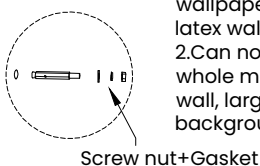

Screw nut+Gasket


3. Place the mounting holes at the back panel of the TV cabinet on the screw kit of the mounting wall, screw the nuts into the screws of the cabinet by hand and tighten with a wrench.

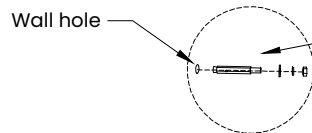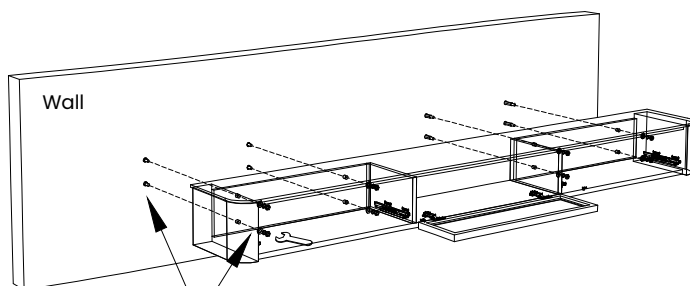


Wall hole

Expansion screw kit


2. Pull out the drawers on both sides of the cabinet, and tighten the nuts inside the cabinet. (See the last page for the method of disassembly and assembly)

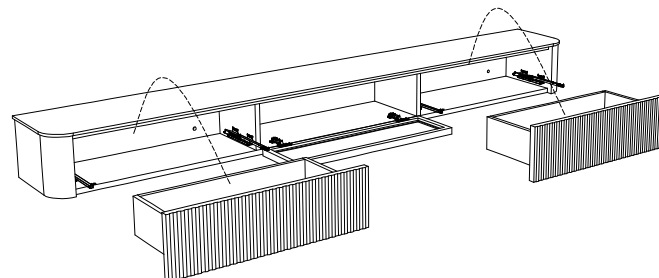

4. Installation completed.

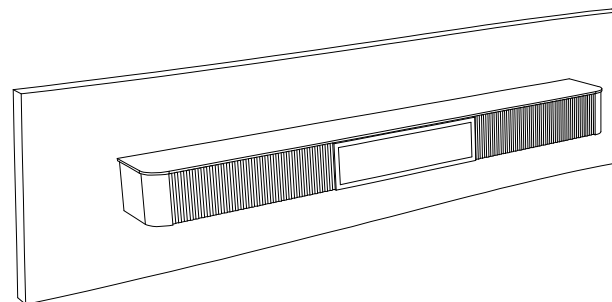

Assembly instructions

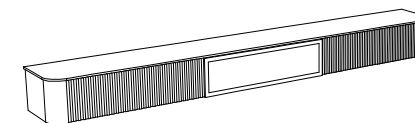

TS817IE220 Installation

The number of people needed for installation: 2

- ① Please read the manual carefully before installing this product. And strictly follow the installation process
- ② Please take good care of this manual for your next installation
- ③ Note: Before installation, screw all the screws to 1/2 of the length of the installation. After all screws are half screwed in, tighten them all together.

Parts list		On a red ribbon are furniture installation accessories		
Serial number	Shape	Name	Quantity required for installation	Spare quantity
A		Expansion screw kit	8	0
B				
C				
D				
E				
F				
G				



Disassembly and assembly instructions for two bottom buffer rail drawers

1. Two-section bottom buffer guide rail.




Disassembly buckle

The way to teardown
drawer:

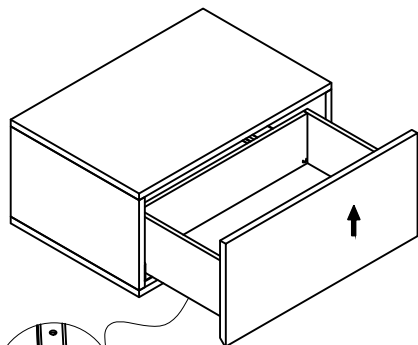

Pull out the disassembly
buckles



Pull out the disassembly
buckle of the two guide
rails below the drawer at
the same time. Gently pull
the drawer up, and then you
can take the drawer down.

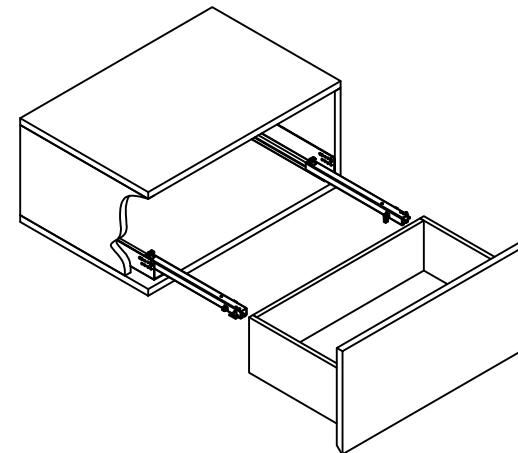

Repeatedly push and pull
the drawer (2-4 times) to
check whether the drawer
has been install on the
guide rais properly. If
not , remove the drawer
and reinstall.


3. The way to
install drawer:

Pull out the
disassembly
buckles

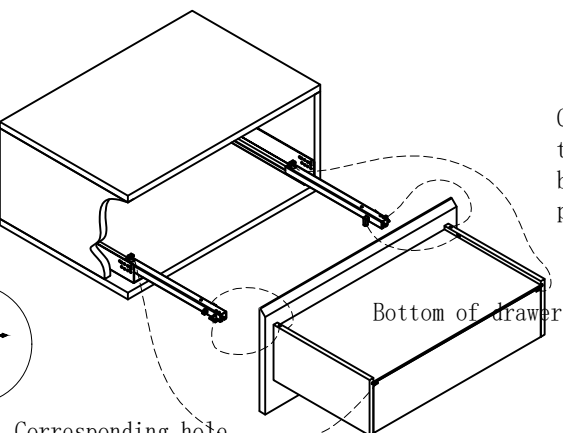


Corresponding hole
location

Check and make sure
the disassembly
buckle has been
pulled out.

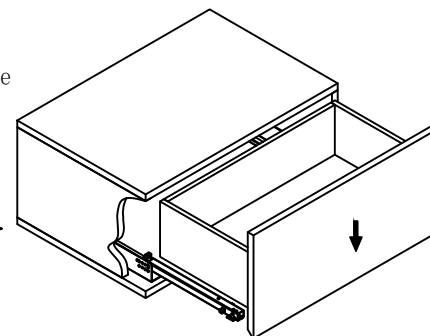

Hold the drawer, put
the holes on the
drawers into the
two-section bottom
buffer guide rail, and
then press down the
buckle to remove it.

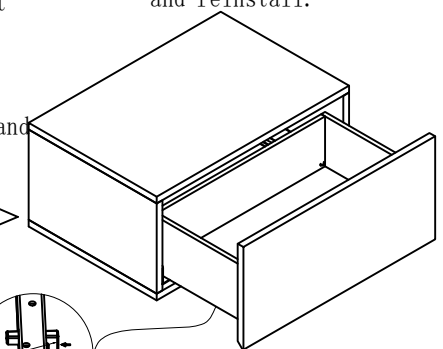

Pull out the
disassembly
buckles

